


ONTEC C M2H 303 M AT B TM-OC.MHATM300B

Click on the selected icon to download the file:




No: V1.14

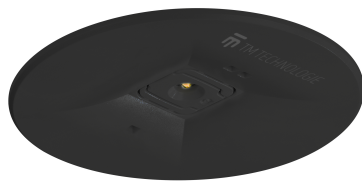

Producer	TM Technologie
Family	ONTEC C
Operating mode	M
Duration time	3 h
Protection degree	IP20
Impact protection degree	IK03
Appliance classes	II
Material	plastic
Installation method*	flush-mounted, ceiling
Light source	LED
Nominal voltage AC	210-250 V
LED lifetime	50000 h
Colour temperature	5700 K

Net dimensions **H x Ø** [±2 mm] **14 mm x 90 mm**



2,5	3,5	8,5	3,5	8,5
3	4	9,5	4	9,5
4	5	11,5	5	11,5
5	5,5	13,5	5,5	13,5
6	6	15	6	15
7	6,5	16,5	6,5	16,5
8	6,5	18,5	6,5	18,5
9	6	20	6	20
10	6	21	6	21

E_{min} ≥ 0,5 lx

* Some of mounting methods are possible only with additional accessory dedicated for that product.