

# INDUST VM 333D CBM H

## TM-VM.D0CBM333H

Click on the selected icon to download the file:



No: 3025



No: 3025




No: 3025




No: V2



No: V1.0

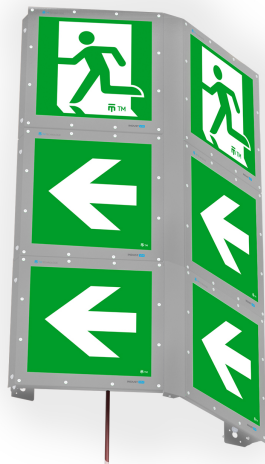

|                                            |                                                     |
|--------------------------------------------|-----------------------------------------------------|
| Producer                                   | <b>TM TECHNOLOGIE</b>                               |
| Category                                   | <b>emergency luminaires</b>                         |
| Application                                | <b>evacuation route direction</b>                   |
| Family                                     | <b>INDUST VM</b>                                    |
| Colour structure                           | <b>raw</b>                                          |
| Version                                    | <b>CBM - Central addressable modulation battery</b> |
| Operating mode                             | <b>CB</b>                                           |
| Protection degree                          | <b>IP66, IP69</b>                                   |
| Impact protection degree                   | <b>IK08</b>                                         |
| Appliance classes                          | <b>I</b>                                            |
| Material                                   | <b>stainless steel</b>                              |
| Installation method*                       | <b>surface, wall</b>                                |
| Adapted to use a pictogram                 | <b>yes</b>                                          |
| Pictogram dimensions                       | <b>353, 2x359, 2 mm</b>                             |
| Evacuation sign dimensions                 | <b>300x300 mm</b>                                   |
| Pictogram type                             | <b>plexiglass PMMA</b>                              |
| Luminous flux                              | <b>&gt;200 cd/m<sup>2</sup></b>                     |
| Visibility                                 | <b>60 m</b>                                         |
| Colour temperature                         | <b>5700 K</b>                                       |
| Nominal voltage AC                         | <b>220-240 V</b>                                    |
| Nominal voltage DC                         | <b>186-254 V</b>                                    |
| Light source                               | <b>LED</b>                                          |
| Maximum light power                        | <b>1.5 W</b>                                        |
| LED lifetime                               | <b>50000 h</b>                                      |
| Minimum temperature                        | <b>-25 °C</b>                                       |
| Maximum temperature                        | <b>+45 °C</b>                                       |
| Battery                                    | <b>-</b>                                            |
| Warranty (body, electronics, light source) | <b>60 months</b>                                    |
| Net dimensions <b>L x W x H</b> [±2 mm]    | <b>714 mm x 223 mm x 1103 mm</b>                    |



\* Some of mounting methods are possible only with additonal accessory dedicated for that product.