

INDUST V 1DF CBM H

TM-VP.DFCBM100H

Click on the selected icon to download the file:



No: 2625



No: 4956/2023
Valid until:
10.05.2028



No: 2625




No: 2625



No: V2




No: V1.0

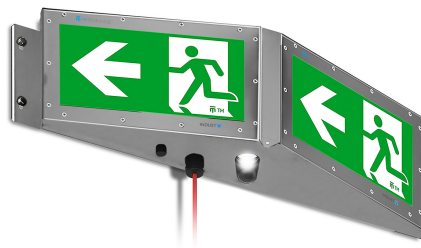

Producer	TM TECHNOLOGIE
Application	evacuation route direction, tunnel lighting
Family	INDUST V
Version	CBM - Central addressable modulation battery
Operating mode	CB
Protection degree	IP66, IP69
Impact protection degree	IK08
Appliance classes	I
Material	stainless steel
Installation method*	surface, wall
Luminous flux	>200 cd/m²
Light source	LED
Maximum light power	0.8 W
Active power	7.8 W
Nominal voltage AC	220-240 V
Nominal voltage DC	186-254 V
LED lifetime	50000 h
Colour temperature	5700 K
Minimum temperature	-25 °C
Maximum temperature	+45 °C

Warranty (body, electronics, light source)	60 months
Net dimensions L x W x H [±2 mm]	760 mm x 158 mm x 244 mm



* Some of mounting methods are possible only with additional accessory dedicated for that product.