
TM TECHNOLOGIE


INDUST V 1DF CBM H
TM-VP.DFCBM100H

Click on the selected icon to download the file:

No: 2626 | No: 4956/2023 Valid until: 10.05.2028 | No: 2626 | No: 2626 | No: DIT.V2.03 | No: V1.0

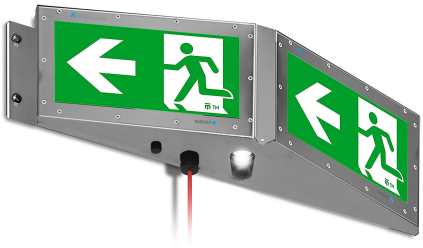

Producer	**TM TECHNOLOGIE**
Category	**emergency luminaires**
Application	**evacuation route direction, tunnel lighting**
Family	**INDUST V**
Colour	**titanium-stabilised stainless steel**
Colour structure	**raw**
Version	**CBM - Central addressable modulation battery**
Operating mode	**CB**
Protection degree	**IP66, IP69**
Impact protection degree	**IK08**
Appliance classes	**I**
Material	**stainless steel**
Installation method*	**surface, wall**
Adapted to use a pictogram	**yes**
Pictogram dimensions	**315, 6X174, 6 mm**
Evacuation sign dimensions	**300x150 mm**
Pictogram type	**foil**
Luminous flux	**>200 cd/m²**
Visibility	**30 m**
Colour temperature	**5700 K**
Nominal voltage AC	**220-240 V**
Nominal voltage DC	**186-254 V**
Light source	**LED**
Maximum light power	**0.8 W**
Active power	**7.8 W**
LED lifetime	**50000 h**
Minimum temperature	**-25 °C**
Maximum temperature	**+45 °C**
Warranty (body, electronics, light source)	**60 months**
Net dimensions **L x W x H** [±2 mm]	**760 mm x 158 mm x 244 mm**



* Some of mounting methods are possible only with additonal accessory dedicated for that product.